
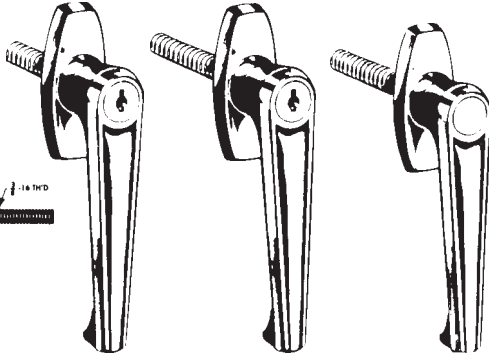


# HANDLE LOCKS

## DISC TUMBLER HANDLE LOCKS



NL-C8751

NL-C8754

NL-C8755

**APPLICATION**—For doors on metal lockers and cabinets. For R.H. doors, install with escutcheon vertical. For L.H. doors, install with escutcheon horizontal. Choice of spindle lengths and mounting. Spindles accept both NL-C8756 latch plate and NL-C8757 tongue. NL-C8749 will accept only the NL-C8757 tongue. Spindles can be cut to fit special requirements.


**OPERATION**—Key removable in both locked and unlocked positions.

**KEYING**—Will key together with all other disc tumbler locks using D8785 key blank.

**KEY BLANK**—D8785.

**PACKAGING**—Supplied with two keys (except NL-C8755) and mounting hardware.

**FINISHES**—26D-Dull Chrome.


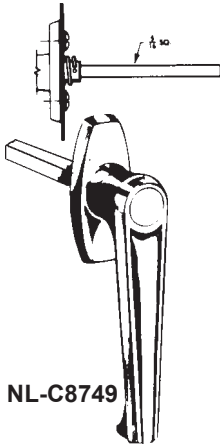


NL-C8749

**CompX**  
NATIONAL

| Stock #       | Type of Mounting | Spindle Length | Direction of Turn to Open | Keyed Alike Numbers Avail. |
|---------------|------------------|----------------|---------------------------|----------------------------|
| NL-C8749-26D  | Rear             | 4"***          | 90° c/cw                  | C415A                      |
| NL-C8751-26D  | Rear             | 1"             | 90° c/cw                  | C413A, C415A               |
| NL-C8754-26D  | Rear             | 3"             | 90° c/cw                  | C413A, C415A               |
| NL-C8755-26D* | Rear             | 3"             | 90° c/cw                  | —                          |
| NL-C8758-26D  | Thru-the         | 1"             | 90° c/cw                  | C413A                      |
| NL-C8759-26D  | Escutcheon       | 3"             | 90° c/cw                  | C413A, C415A               |


\*Non-locking handle. \*\*5/16" sq. spindle

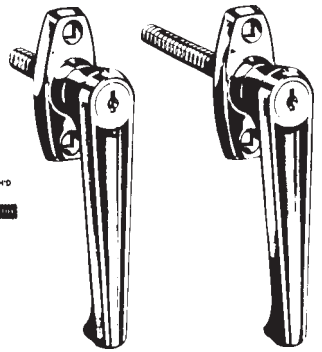


NL-C8758

NL-C8759

## LATCH PLATE & TONGUE FOR ABOVE HANDLE LOCKS





NL-C8756-2C



NL-C8757-2C

| Stock No.   | Description  | Method of Attachment to spindle                 |
|-------------|--|---|
| NL-C8756-2C | 3 point latch plate with tongue. Used with locking bars. | Hex nuts with lock washers threaded on spindle. |
| NL-C8757-2C | Single point latch tongue                                | Side mounted set screw                          |

## PIN TUMBLER KNOB LOCKS



NL-C8154, NL-C8155

**APPLICATION**—For metal cabinet doors. Reversible for R.H. or L.H. application. Latch plate is used for either in 2\* or 3 point latching. (\*Install with tongue pointing away from jamb.)

**OPERATION**—90° turn to open. Choice of key operation, see below.

**KEYING**—Will key together with all other pin tumbler locks using D4291 key blank except NL-C8700 series mail box locks. Available keyed different or keyed alike.

**KEY BLANK**—D4291.

**PACKAGING**—Supplied with two keys, mounting nut and screw for latch plate.

**FINISHES**—26D-Dull Chrome.

| Stock #      | Description                                      | Max. Mat. Thick. | K.A. No. |
|--------------|--|------------------|----------|
| NL-C8154-26D | Key removable in both locked /unlocked positions | 1/8"             | 107      |
| NL-C8155-26D | Key removable in locked position only            | 1/8"             | 107, 915 |

©ZIPF LOCK COMPANY




# MISCELLANEOUS

## WINDOW HARDWARE



### Window Lock

- Spring actuated lever provides positive direct pull which pulls rails together.
- Stops rattles and drafts.
- When unlocking, lever automatically returns to opened position.
- Made from wrought steel.
- Meets design requirements of ANSI/BHMA 156.16.
- Dimensions: Base: 1-3/8" x 2-5/16"; Strike: 9/16" x 2-1/4"




**Stock No. (Specify Finish)**

**IV-4F3**

Finishes: 3

### Window Lock

- Designed low to the sash for superior strength and greater resistance to breakage.
- Vertical and horizontal camming action for snug, non-rattling fit.
- Heavy gauge springs provide long-wearing action.
- Made from solid brass or aluminum.
- Meets design requirements of ANSI/BHMA 156.16.
- Dimensions:  
Base: 15/16" x 2-9/16"  
Strike: 5/8" x 2-9/16"



**Stock No. (Specify Finish)**

**IV-07A3** Aluminum

Finishes: 3

**IV-07MB** Solid Brass

Finishes: 3, 10B, 15, 15A, 26

### Bar Window Lift

- Facilitates opening of window in a safe manner.
- Can also be used as a drawer or utility pull.
- Made from solid brass or aluminum.
- Meets ANSI/BHMA A156.16.
- Dimensions:  
Base: 1-1/8" x 4"  
Projection: 1-1/16"



**Stock No. (Specify Finish)**

**IV-026A3** Aluminum

Finishes: 3

**IV-026MB** Solid Brass

Finishes: 3, 14

### Casement Fastener (2 sizes)

- For use on windows to provide weather-tight fastening and security.
- Also ideal for securing louvered doors and small doors.
- Made from solid brass or aluminum.
- Meets ANSI/BHMA A156.16.
- Dimensions:

#### IV-066


Base: 1-5/8" x 7/8"

Projection: 1-3/8"

#### IV-66

Base: 2-1/16" x 1-1/16"

Projection: 1-7/8"



**Stock No. (w/rim & mortise strikes)**

**IV-66A3 RS MS** Aluminum

Finishes: 3

**Stock No. (w/mortise strike)**

**IV-66B \* MS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/rim strike)**


**IV-66B \* RS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/surface strike)**

**IV-66B \* SS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D



**Stock No. (w/rim & mortise strikes)**

**IV-066A3 RS MS** Aluminum

Finishes: 3

**Stock No. (w/mortise strike)**

**IV-066B \* MS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/rim strike)**

**IV-066B \* RS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/surface strike)**

**IV-066B \* SS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

