

MISCELLANEOUS

POCKET DOOR LOCKS & PULLS



Sliding Door Edge Pull

- 3/4" width allows installation on narrow as well as standard doors.
- Spring automatically returns lever flush with plate.
- Made from solid brass.
- Conforms to design requirements of ANSI/BHMA A156.14 D2801.
- Dimensions: 3-7/8" H x 3/4" W

Stock No. (Specify Finish)

IV-230B

Finishes: 3, 5, 10B, 15, 15A, 26, 26D



Round Pocket Door Lock


- Fits standard 2-1/8" prep.
- Installs in minutes.
- Auto Catch Lock Mechanism.
- Lifetime Mechanical Warranty.
- 10-year Finish Warranty.

Stock No. Description

KW-334 Passage

KW-335 Privacy

Specify Stock No. and Finish.

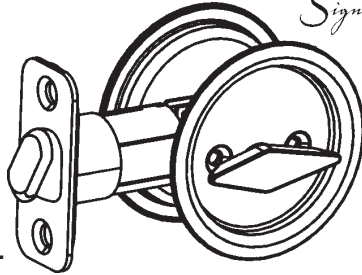

12 locks per case.

SPECIFICATIONS

DOOR THICK: 1-3/8" to 1-3/4"

BACKSET: 2-3/8"

BORE: 2-1/8" x 1"

FINISHES: **US-3** (605) Polished Brass

US-5 (609) Antique Brass

US-10B (613) Oil Rubbed Bronze

US-15(619) Satin Nickel

US-15A (620) Antique Nickel

US-26D (626) Satin Chrome


US-32 (629) Bright Stainless Steel

STORM DOOR LOCKS



Storm Door Latch


- For wood storm doors 7/8" to 1-1/8" thick.
- Reversible: fits right or left hand, inswinging or outswinging doors.
- Security lock feature operates from inside rose.
- Solid brass safety strike assures latching and is designed to compensate for air pressure build-up between doors.
- Made from wrought brass.
- Dimensions:
Backset: 1-3/4"
Rose Diameter: 1-7/8"
Knob Diameter: 1-3/4"
Knob Projection: 2"
Lever Length: 1-3/4"
Lever Projection: 1-7/8"

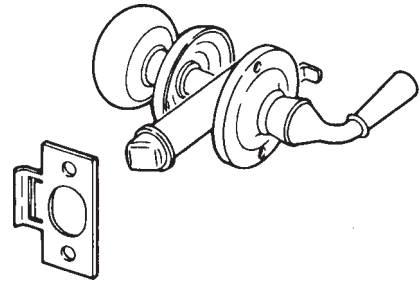

Stock No. (Specify Finish)

IV-980B


Finishes: 3, 5, 10B, 15, 15A, 26, 26D



TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 3".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 1".

- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.



TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 7/8".
- Installs with spring loaded strike plate.



©ZIPF LOCK COMPANY

See page 427 for Cal Royal, Don Jo, Ives finish descriptions.


MISCELLANEOUS

STORM DOOR LOCKS

TULIP KEY-IN-KNOB LOCK

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-3/8" thick.
- Installation hole spacing 3".
- Installs in three 1/2" holes.
- Backset from jamb (door stop) 1".
- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.
- Key lock for extra security.

Wright
PRODUCTS




V909

PUSH BUTTON LATCH

- For outswinging wood or metal doors.
- Fits doors 1" to 1-1/4" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Contains two sizes of strikes and shims to provide adjustment for latching.
- Has "No-Lock-Out" feature.

Wright
PRODUCTS



V333
VK333-3 Key Lock

COLONIAL PUSH BUTTON LOCK

- Authentic colonial hammered finish.
- For outswinging wood or metal doors.
- Fits doors 1" to 1-1/4" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Contains two sizes of strikes and shims to provide adjustment for latching.
- Has "No-Lock-Out" feature.
- Key lock for extra security.


Wright
PRODUCTS



VCK333-3BL

PUSH-PULL LATCH

- For wood or metal doors.
- Fits outswinging doors 7/8" to 1-3/8" thick.
- Installs with 1" diameter hole-no mortising.
- Backset 13/16" from jamb (door stop).
- Pull to open from outside, push to open from inside.



Wright
PRODUCTS

V1000

STORM DOOR CLOSERS

Wright
PRODUCTS




V1020 Aluminum Finish
V1020BL Black Finish

PNEUMATIC DOOR CLOSER

- For outswinging wood or metal doors.
- Full 90° opening.
- Two hole end plug for summer or winter adjustable latching power.
- Adjustable closing speed.
- Factory lubricated.
- Internal spring for prevention of rod bending.
- Replacement cover plate furnished to cover old door bracket installation holes.

TRAILER LOCKS


Comp
FORT



- TL-37 KD Key Different
TL-37 KA 1339 Keyed Alike 1339
- 5000 series double bitting, 6 tumbler, key retaining in unlocked position, solid die cast construction. Key blank: K750. 90° key rotation

More on pages 473, 497-498.

Wright
PRODUCTS

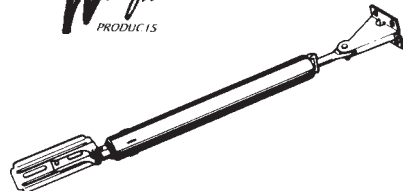

VH440BL

HYDRAULIC DOOR CLOSER

- Hydraulic mechanism provides smooth constant "no bounce" action.
- For outswinging wood or metal doors.
- Full 90° opening.
- Two hole end plug for summer or winter adjustable latching power.
- Adjustable closing speed by rotating the tube.
- Factory lubricated.
- Aluminum tube assembly.
- Replacement cover plate furnished to cover old door bracket installation holes.
- Black Finish

©ZIPF LOCK COMPANY